

CONNECTED BY AVENTICS PNEUMATIC CONNECTION TECHNOLOGIES



Pneumatics
It's that easy



Connections with push-in fittings, metal QR2-S series standard

M5 - G 1/2 thread

Compressed air tubing \varnothing 4 - 16 mm

Straight fitting

QR2-S-RPN	G	\varnothing D	LE	
	M5	4	25	1823373038
	M5	6	25	1823373040
	M7	4	25	1823373100
	M7	6	25	1823373088
	G 1/8	4	25	1823373041
	G 1/8	6	25	1823373043
	G 1/8	8	10	1823373044
	G 1/4	4	25	1823373045
	G 1/4	6	25	1823373047
	G 1/4	8	10	1823373048
	G 1/4	10	10	1823373049
	G 1/4	12	10	1823391809
	G 3/8	8	10	1823373050
	G 3/8	10	10	1823373051
	G 3/8	12	5	1823373052
	G 3/8	14	5	1823373053
	G 1/2	12	5	1823373054
	G 1/2	14	5	1823373055
	G 1/2	16	1	R412007955



Push-in connector

QR2-S-RAS	G	\varnothing D	LE	
	M5	4	25	1823373056
	M5	6	25	1823373058
	M7	4	10	1823373101
	M7	6	10	1823373102
	G 1/8	4	25	1823373059
	G 1/8	6	25	1823373061
	G 1/8	8	25	1823373062
	G 1/4	4	25	1823373063
	G 1/4	6	25	1823373065
	G 1/4	8	25	1823373066
	G 1/4	10	10	1823373067
	G 1/4	12	10	1823391810
	G 3/8	8	10	1823373068
	G 3/8	10	10	1823373069
	G 3/8	12	10	1823373070
	G 3/8	14	10	1823373071
	G 1/2	12	10	1823373072
	G 1/2	14	10	1823373073



Straight female stud fitting

QR2-S-RAI	G	\varnothing D	LE	
	G 1/8	4	10	1823391643
	G 1/8	6	10	1823391645
	G 1/8	8	10	1823391646
	G 1/4	4	10	1823391647
	G 1/4	5	10	1823391648
	G 1/4	6	10	1823391649
	G 1/4	8	10	1823391650



Push-in connector, long

QR2-S-RAL	G	\varnothing D	LE	
	M7	4	10	1823391887
	M7	6	10	1823391888
	G 1/8	4	10	1823373074
	G 1/8	6	10	1823373075
	G 1/8	8	10	1823373076
	G 1/4	6	10	1823373077
	G 1/4	8	10	1823373078
	G 1/4	10	10	1823373079




Bulkhead connector

QR2-S-RSI	G	\varnothing D	LE	
	G 1/8	4	10	1823391757
	G 1/8	6	10	1823391758
	G 1/8	8	10	1823391760
	G 1/4	6	10	1823391759
	G 1/4	8	10	1823391761



Elbow fitting

QR2-S-RVT	G	Ø D	LE	
	M5	4	10	1823391709
	M5	6	10	1823391889
	M7	4	10	1823391885
	M7	6	10	1823391886
	G 1/8	4	10	1823391710
	G 1/8	6	10	1823391711
	G 1/8	8	10	1823391712
	G 1/8	10	10	R412007687
	G 1/4	4	10	1823391713
	G 1/4	6	10	1823391714
	G 1/4	8	10	1823391715
	G 1/4	10	5	1823391718
	G 1/4	12	5	1823391843
	G 3/8	8	10	1823391716
	G 3/8	10	5	1823391717
	G 3/8	12	5	1823391838
	G 3/8	14	5	1823391839
	G 1/2	10	5	R412007589
	G 1/2	12	5	1823391840
	G 1/2	14	5	1823391841
	G 1/2	16	1	R412007956



Elbow fitting, long

QR2-S-RVL	G	Ø D	LE	
	G 1/8	4	10	R412010270
	G 1/8	6	10	R412010271
	G 1/8	8	10	R412010272
	G 1/4	6	10	R412010273
	G 1/4	8	10	R412010274




Swivel banjo connection, 1x

QR2-S-RW1	G	Ø D	LE	
	M5	4	10	1823391549
	M5	6	10	1823391905
	G 1/8	4	10	1823391551
	G 1/8	6	10	1823391553
	G 1/8	8	10	1823391554
	G 1/4	6	10	1823391556
	G 1/4	8	10	1823391557
	G 1/4	10	5	1823391558
	G 3/8	8	5	1823391559
	G 3/8	10	5	1823391560
	G 3/8	12	5	1823391561




Swivel banjo connection, 1x, hexagon socket

QR2-S-R11	G	Ø D	LE	
	M5	4	10	1823391652
	G 1/8	4	10	1823391654
	G 1/8	6	10	1823391656
	G 1/8	8	10	1823391657
	G 1/4	6	10	1823391658
	G 1/4	8	10	1823391659
	G 1/4	10	10	1823391660
	G 1/4	12	10	1823391927
	G 3/8	8	2	1823391897
	G 3/8	10	2	1823391898
	G 3/8	12	2	1823391899




Swivel banjo connection, 2x

QR2-S-R12	G	Ø D	LE	
	G 1/8	4	10	1823391913
	G 1/8	6	10	1823391914
	G 1/8	8	10	1823391915
	G 1/4	6	10	1823391916
	G 1/4	8	10	1823391917
	G 1/4	10	10	1823391918
	G 1/4	12	10	1823391919




Swivel banjo connection, 3x

QR2-S-R13	G	Ø D	LE	
	G 1/8	4	10	1823391920
	G 1/8	6	10	1823391921
	G 1/8	8	10	1823391922
	G 1/4	6	10	1823391923
	G 1/4	8	10	1823391924
	G 1/4	10	10	1823391925
	G 1/4	12	10	1823391926




T-union

QR2-S-RTT	G	Ø D	LE	
	M5	4	10	1823391812
	G 1/8	4	10	1823391813
	G 1/8	6	10	1823391814
	G 1/8	8	10	1823391815
	G 1/4	4	10	1823391816
	G 1/4	6	10	1823391817
	G 1/4	8	10	1823391818
	G 1/4	10	10	1823391819
	G 1/4	12	10	1823391823
	G 3/8	8	10	1823391820
	G 3/8	10	10	1823391821
	G 3/8	12	10	1823391822
	G 1/2	14	10	1823391824




T-banjo connection, hexagon socket

QR2-S-RTI	G	Ø D	LE	
	M5	4	10	1823391661
	G 1/8	4	10	1823391663
	G 1/8	6	10	1823391665
	G 1/8	8	10	1823391666
	G 1/4	6	10	1823391667
	G 1/4	8	10	1823391668
	G 1/4	10	10	1823391669
	G 1/4	10	10	1823391660
	G 3/8	8	2	1823391900
	G 3/8	10	2	1823391901
	G 3/8	12	2	1823391902




T-banjo connection

QR2-S-RTS	G	Ø D	LE	
	M5	4	10	1823391562
	G 1/8	4	10	1823391564
	G 1/8	6	10	1823391566
	G 1/8	8	10	1823391567
	G 1/4	6	10	1823391568
	G 1/4	8	10	1823391569
	G 1/4	10	5	1823391570
	G 3/8	8	5	1823391571
	G 3/8	10	5	1823391572
	G 3/8	12	5	1823391573




Elbow fitting

QR2-S-RLT	G	Ø D	LE	
	M5	4	10	1823391825
	G 1/8	4	10	1823391826
	G 1/8	6	10	1823391827
	G 1/8	8	10	1823391828
	G 1/4	4	10	1823391829
	G 1/4	6	10	1823391830
	G 1/4	8	10	1823391831
	G 1/4	10	10	1823391832
	G 1/4	12	5	1823391836
	G 3/8	8	10	1823391833
	G 3/8	10	10	1823391834
	G 3/8	12	5	1823391835
	G 1/2	14	5	1823391837



Bulkhead plug connector

QR2-S-RSM	G	Ø D	LE	
	4	M10x1	10	1823391636
	6	M14x1	10	1823391638
	8	M16x1	10	1823391639
	10	M17x1	10	1823391640
	12	M20x1	5	1823391641
	14	M22x1	5	1823391642



Straight plug connector

QR2-S-RSK	G	Ø D	LE	
	4	M10x1	10	1823386077
	6	M14x1	10	1823386079
	8	M16x1	10	1823386080
	10	M17x1	10	1823386081
	12	M20x1	5	1823386082
	14	M22x1	5	1823386083



Angled plug connector

QR2-S-RVK	G	Ø D	LE	
	4	M10x1	10	1823380012
	6	M14x1	10	1823380014
	8	M16x1	10	1823380015
	10	M17x1	10	1823380016
	12	M20x1	5	1823380017
	14	M22x1	5	1823380018




T-plug connector

QR2-S-RTK	G	Ø D	LE	
	4	M10x1	10	1823381043
	6	M14x1	10	1823381045
	8	M16x1	10	1823381046
	10	M17x1	10	1823381047
	12	M20x1	5	1823381048
	14	M22x1	5	1823381049




Straight push-in fitting, increasing

QR2-S-REE	Ø D1	Ø D2	LE	
	4	6	10	1823391628
	6	8	10	1823391890



Straight push-in fitting, reducing

QR2-S-RED	Ø D1	Ø D2	LE	
	6	4	10	1823391615
	8	4	10	1823391617
	8	6	10	1823391619
	10	6	10	1823391620
	10	8	10	1823391621
	12	4	10	1823391622
	12	6	10	1823391623
	12	8	10	1823391624
	12	10	5	1823391903
	14	4	5	1823391625
	14	6	5	1823391626
	14	8	5	1823391627
	14	10	5	1823391842
	14	12	10	1823391811



Angled plug connector

QR2-S-RVA	Ø D	LE	
	4	10	R412004851
	6	10	R412004852
	8	10	1823391942
	10	10	1823391943
	12	10	1823391944
	14	10	R412010739



Connection piece

QR2-S-RDS	Ø D	LE	
	4	25	1823391629
	6	25	1823391631
	8	25	1823391632
	10	25	1823391633
	12	10	1823391634
	14	10	1823391635
	16	10	R412010191



Blanking plug

QR2-S-RBS	Ø D	LE	
	4	25	1823391607
	6	25	1823391609
	8	25	1823391610
	10	25	1823391611
	12	10	1823391612
	14	10	1823391613



Connections with push-in fittings QR2-C series stainless steel

M5 - G 1/2 thread

Compressed air tubing Ø 4 - 12 mm

Straight fitting

QR2-C-RPN	G	Ø D	LE	
	M5	4	2	2544004050
	G 1/8	4	2	R412004890
	G 1/8	6	2	R412004891
	G 1/8	8	2	R412004892
	G 1/4	6	2	R412004893
	G 1/4	8	2	R412004894
	G 1/4	10	2	R412004895
	G 3/8	10	2	R412004896
	G 3/8	12	2	R412004897



Banjo bolt, 1x, with 2 sealing rings

QR2-C-RH1	G	LE	
	G 1/8	2	R412004978
	G 1/4	2	R412004979



Elbow fitting

QR2-C-RVT	G	Ø D	LE	
	M5	4	2	R412005617
	G 1/8	4	2	R412004898
	G 1/8	6	2	R412004899
	G 1/8	8	2	R412004900
	G 1/4	6	2	R412004901
	G 1/4	8	2	R412005616
	G 3/8	10	1	R412004902
	G 3/8	12	1	R412004903



Banjo union, 1x, without sealing ring

QR2-C-RV1	G	LE		
	G 1/8	4	2	R412004973
	G 1/8	6	2	R412004974
	G 1/8	8	2	R412004975
	G 1/4	6	2	R412004976
	G 1/4	8	2	R412004977



T-union

QR2-C-RTT	G	Ø D	LE	
	M5	4	2	R412004889
	G 1/8	4	2	R412004904
	G 1/8	6	2	R412004905
	G 1/8	8	2	R412004906
	G 1/4	6	2	R412004907
	G 1/4	8	2	R412004908



Straight plug connector

QR2-C-RSK	Ø D	LE	
	4	2	R412004982
	6	2	R412004983
	8	2	R412004984
	10	2	R412004985
	12	2	R412004986




Bulkhead plug connector

QR2-C-RSM	G	Ø D	LE	
	M12x1	4	2	2544404000
	M14x1	6	2	2544406000
	M16x1	8	2	2544408000
	M18x1	10	2	2544410000
	M20x1	12	2	2544412000



Bulkhead connector

QR2-C-RSG	G	LE	
	G 1/8	2	R412004961
	G 1/4	2	R412004962
	G 3/8	2	R412004963
	G 1/2	1	R415009442



Angled plug connector

QR2-C-RVK	Ø D	LE	
	4	2	2544204000
	6	2	2544206000
	8	2	2544208000
	10	2	2544210000
	12	2	2544212000




T-plug connector

QR2-C-RTK	Ø D	LE	
	4	2	2544304000
	6	2	2544306000
	8	2	2544308000
	10	2	2544310000
	12	2	2544312000




Straight push-in fitting, reducing

QR2-C-RED	Ø D1	Ø D2	LE	
	6	4	2	2544506040
	8	6	2	2544508060
	10	8	2	2544510080



Straight fitting, tapered

QR2-C-RPN	G	Ø D	LE	
	R 1/8	4	2	2544004180
	R 1/8	6	2	2544006180
	R 1/8	8	2	2544008180
	R 1/4	4	2	2544004140
	R 1/4	6	2	2544006140
	R 1/4	8	2	2544008140
	R 1/4	10	2	2544010140
	R 3/8	10	1	2544010380
	R 3/8	12	1	2544012380
	R 1/2	12	1	2544012120





Elbow fitting, tapered

QR2-C-RVT	G	Ø D	LE	
	R 1/8	4	2	2544004180
	R 1/8	6	2	2544006180
	R 1/8	8	2	2544008180
	R 1/4	6	2	2544006140
	R 1/4	8	2	2544008140
	R 1/4	10	2	2544010140
	R 3/8	10	1	2544010380
	R 3/8	12	1	2544012380
	R 1/2	12	1	2544012120



T-union, tapered

QR2-C-RTT	G	Ø D	LE	
	R 1/8	4	2	R412004968
	R 1/8	6	2	R412004969
	R 1/8	8	2	R412004970
	R 1/4	6	2	R412004971
	R 1/4	8	2	R412004972
	R 1/4	10	2	R412004909
	R 3/8	10	1	R412004910

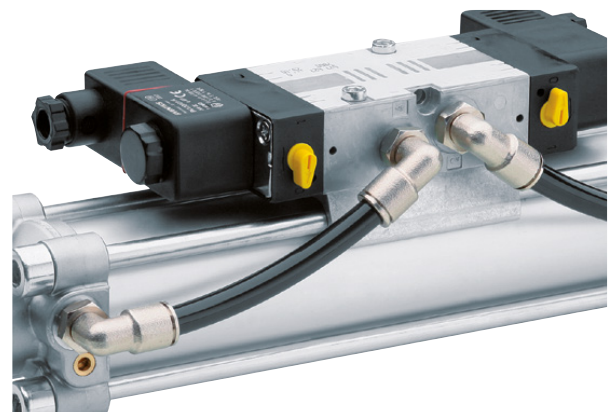

Connections with push-in fittings QR2-F series heat-resistant

M5 - G 1/2 thread

Compressed air tubing \varnothing 4 - 12 mm

Straight fitting, heat-resistant

QR2-F-RPN	G	\varnothing D	LE	
	M5	4	25	1823373089
	M5	6	25	1823373090
	G 1/8	4	25	1823373091
	G 1/8	6	25	1823373092
	G 1/8	8	25	1823373093
	G 1/4	4	25	1823373094
	G 1/4	6	25	1823373095
	G 1/4	8	10	1823373096
	G 1/4	10	10	1823373097
	G 1/4	12	10	R412007625
	G 3/8	8	10	1823373098
	G 3/8	10	10	1823373099
	G 1/2	12	10	R412007730



Bulkhead plug connector, heat-resistant

QR2-F-RSM	\varnothing D	LE	
	6	10	R412007629
	8	10	R412007628
	10	10	R412007627
	12	5	R412007626



Straight plug connector, heat-resistant

QR2-F-RSK	\varnothing D	LE	
	4	10	1823386100
	6	10	1823386101
	8	10	1823386102
	10	10	1823386103



Straight female stud fitting, heat-resistant

QR2-F-RAI	G	\varnothing D	LE	
	G 1/8	4	10	1823391857
	G 1/8	6	10	1823391858
	G 1/8	8	10	1823391859
	G 1/4	6	10	1823391860
	G 1/4	8	10	1823391861




Angled plug connector, heat-resistant

QR2-F-RVK	\varnothing D	LE	
	4	10	1823380019
	6	10	1823380020
	8	10	1823380021
	10	10	1823380022



Elbow fitting, heat-resistant

QR2-F-RVT	G	\varnothing D	LE	
	M5	4	10	1823391870
	M5	6	10	R412007681
	G 1/8	4	10	1823391871
	G 1/8	6	10	1823391872
	G 1/8	8	10	1823391873
	G 1/4	6	10	1823391874
	G 1/4	8	10	1823391875
	G 1/4	10	10	1823391876
	G 1/4	12	5	R412007624
	G 3/8	8	5	1823391877
	G 3/8	10	5	1823391878
	G 3/8	12	5	R412007623
	G 1/2	12	5	R412007731




T-plug connector, heat-resistant

QR2-F-RTK	\varnothing D	LE	
	4	10	1823381050
	6	10	1823381051
	8	10	1823381052
	10	10	1823381053
	12	10	R412007732



Straight push-in fitting, heat-resistant, reducing

QR2-F-RED	\varnothing D1	\varnothing D2	LE	
	8	6	10	R412007682
	10	6	10	R412007683



Compressed air tubing made of polyurethane (PUR)

TU1-S-PUR

Dimensions	Length	Black	Blue	Red	Natural
[mm]	[m]				
3 x 0.6	50	1820712068	1820712067	1820712066	1820712069
4 x 0.75	25	-	-	1820712020	-
4 x 0.75	50	R412009984	R412009985	-	R412014554
4 x 0.75	100	1820712018	1820712036	1820712026	1820712007
6 x 1.05	25	-	-	1820712022	-
6 x 1.05	50	R412009987	R412009988	-	R412014556
6 x 1.05	100	1820712019	1820712037	1820712027	1820712006
8 x 1.15	25	-	-	1820712023	-
8 x 1.15	50	R412009989	R412009990	-	R412014557
8 x 1.15	100	1820712016	1820712038	1820712028	1820712008
10 x 1.25	25	1820712015	-	1820712025	-
10 x 1.25	50	-	R412009991	-	R412014558
10 x 1.25	100	1820712081	1820712039	1820712029	1820712009
12 x 1.5	25	1820712014	-	1820712024	-
12 x 1.5	50	-	R412009992	-	R412014559
12 x 1.5	100	1820712017	1820712040	1820712083	1820712082
14 x 2	25	R412004778	R412004782	-	R412004790
14 x 2	100	R412004779	R412004783	-	-
16 x 2.5	25	R412004780	R412004784	-	R412004792
16 x 2.5	100	R412004781	R412004785	R412004789	R412004793

TU1-F-PUR FOOD

Dimensions	Length	Translucent red	Translucent blue	Translucent black	Natural
[mm]	[m]				
4 x 0.75	25	-	R412004796	R412009963	R412004797
6 x 1.05	25	R412009901	1820712044	1820712043	1820712042
8 x 1.25	25	R412004994	1820712047	1820712046	1820712045
10 x 1.5	25	-	R412004798	R412009964	R412004799
10 x 1.5	100	R412014560	-	-	-
12 x 2	25	-	R412009965	-	R412009967
12 x 2	100	R412009949	-	R412009948	-

TU1-E-PUR ECONOMY

Dimensions	Length	Black	Blue	Natural
[mm]	[m]			
4 x 0.75	500	R412007824	R412007825	R412007823
6 x 1	500	R412007827	R412007828	R412007826
8 x 1.15	500	R412007830	R412007831	R412007829
10 x 1.25	400	-	R412007834	-
12 x 1.5	300	-	R412007837	-

TU1-A-PUR

Dimensions	Length	Black
[mm]	[m]	
4 x 0.75	50	1820712089
6 x 1.05	50	1820712091
8 x 1.15	50	1820712092
10 x 1.25	50	1820712093

TU1-X-PUR FLAMEX

Dimensions	Length	Black
[mm]	[m]	
4 x 1	25	1820712084
8 x 2	25	1820712085
10 x 2	25	1820712086
12 x 2	25	1820712087
14 x 2	25	1820712088

TU2-S-PUR DUO

Dimensions	Length	Black-blue
[mm]	[m]	
4 x 0.75	25	1820712070
6 x 1.05	25	1820712072
8 x 1.15	25	1820712073
10 x 1.25	25	1820712074

The right material for every application

AVENTICS has a high-quality range of polymer tubing in different materials and qualities that complies with specific technical or economic factors.

Series	TU1-S-	TU1-F-	TU1-E-	TU1-A-	TU1-X-	TU1-S-	TU1-S-	TU1-S-	TU1-S-
	PUR	PUR	PUR	PUR	PUR	PAM	PET	TEF	PVC
Anti-static	-	-	-	+	-	-	-	-	-
Resistant to microbes	○	+	○	+	+	++	++	++	+
Flame protection (UL94V), resistant to welding sparks	-	-	-	-	+	UL94HB	-	++	-/○
Halogen-/fluorine-free	+	+	+	+	+	++	++	- ¹	-
Resistance to hydrolysis	○	+	○	+	+	++	++	++	+
Suitable for dynamic laying	+	+	+	+	+	+	+	○ ²	-
UV resistant	○	○	○	+	+	+	○	++	-
High pressure resistance	+	+	-	+	+	++	-	○ ³	+/++

++ highly recommended + recommended ○ suitable - less suitable
¹Fluoropolymer ²not in general; must be checked in individual cases ³dependent on temperature



Compressed air tubing made of polyamide (PAM)

TU1-S-PAM

Dimensions	Length	Black	Natural
[mm]	[m]		
4 x 1	25	1820712110	1820712100
6 x 1	25	1820712111	1820712101
8 x 1	25	1820712112	1820712102
10 x 1	25	1820712115	1820712105
12 x 1,5	25	1820712113	1820712103
14 x 1,5	25	1820712114	1820712104

TU1-S-PAM HIGH FLOW

Dimensions	Length	Blue
[mm]	[m]	
4 x 0.5	25	R412009913
4 x 0.5	100	R412009914
6 x 0.65	25	R412009915
6 x 0.65	100	R412009917
8 x 0.8	25	R412009918
8 x 0.8	100	R412009920
10 x 1	25	R412009921
10 x 1	100	R412009923
12 x 1.1	25	R412009924
12 x 1.1	100	R412009926
14 x 1.25	25	R412009927
16 x 1.35	25	R412009929

You can find compressed air tubing in additional colors and sizes in our product offering

- Single tubing, duo tubing, and spiral tubing
- Polyurethane (PUR), polyamide (PAM), Teflon (TEF), polyethylene terephthalate (PET), and polyvinyl chloride (PVC)

Pneumatic connection technology without push-in fittings for special applications

Couplings

From standard lock couplings with various connection types to safety couplings.



Coupling with tube nut, CP1 series



Coupling with external thread, CP1 series

Fittings with tube nuts

The range includes plastic and metal standard variants as well as additional special forms.



Fittings with tube nuts, NU1 series, plastic, and NU2 series, metal

Throttle valves, check-choke valves, non-return valves

Also available in versions with an integrated silencer or for use as a screw-in throttle. Some versions also suitable for direct installation in piping.



Check-choke valve, CH01 and CH02 series



Non-return valve, NR01 and NR02 series

Other connector accessories

The product range includes blanking plugs and connectors in many shapes and with tailored connections.



Double-nipple fitting, FPT series



Blanking plug, FPT series

Flow and check valves

Shut-off valves, manual spool valves, quick exhaust valves



Shut-off valve



ML manual spool valve



Quick exhaust valve, 573 series

In dialog with our customers and partners

Based on proven expertise and a first-class product range

Our understanding of cooperation goes well beyond individual projects. We are constantly in dialog with our customers and are always a competent contact for both technical and economic questions. The know-how contained in our comprehensive pneumatic product range gives us a solid foundation for our work.

- Cylinders and sensor technology
- Valves, valve systems, field bus connections
- Gripper and vacuum technology
- Compressed air preparation, assembly material, accessories

Understanding our customers allows us to respond more quickly and give us a head start in achieving tailor-made solutions. Thus, we always remain close to the action and ensure the technological lead for us and our customers.



Around-the-clock information

The AVENTICS Internet Portal never sleeps. In the online catalog, you can find additional information covering the entire product range, including all technical details, as well as the use of user-friendly Engineering Tools, www.engineering-tools.com



www.engineering-tools.com

Our offer for you: Your individual QR trolley!

For our customers with high demands, we offer the special AVENTICS QR trolley for practical parts storage. The QR trolley is a robust modular system for fittings and accessories, which can be individually equipped as needed. You always have the right accessories at hand, clearly arranged and in ample quantities – even last-minute needs are covered. If you are interested, please get in touch with your contact directly.



Advantages

- ✓ On-site availability of accessories at all times
- ✓ No warehouse administration and capital commitment
- ✓ Increased delivery flexibility
- ✓ No logistical risks
- ✓ Reduced process costs

AVENTICS GmbH
Ulmer Straße 4
30880 Laatzen, Germany
www.aventics.com
info@aventics.com



Follow us:



Your Contact:



Further contacts:
www.aventics.com/contact

The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.